


SPECIFICATIONS

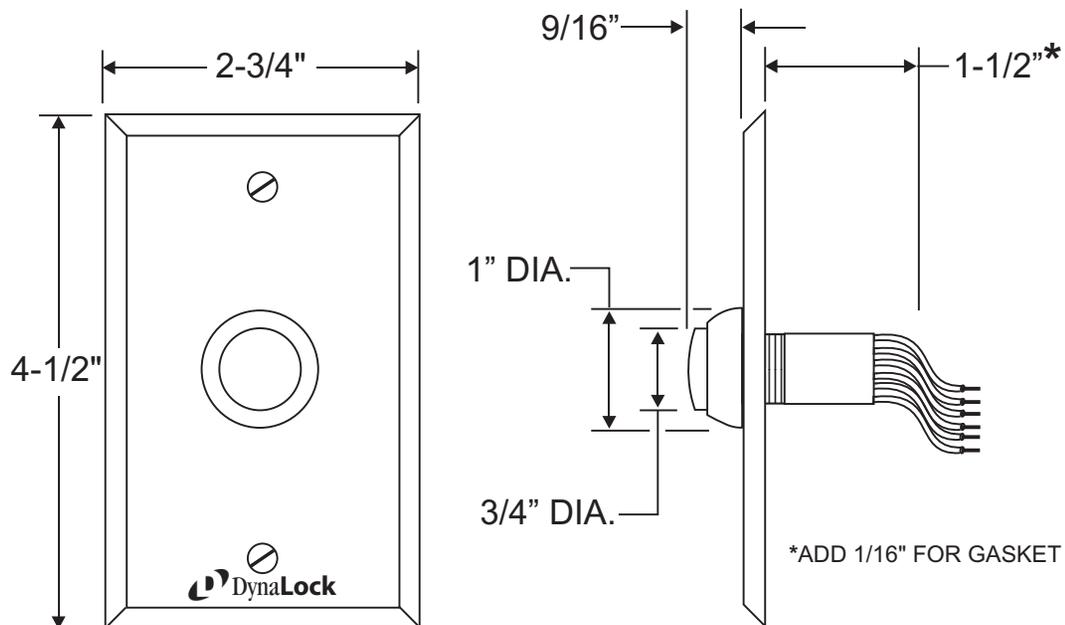

DYNALOCK SERIES #6170 FEATURES:

3/4" DIA. WHITE THERMOPLASTIC BUTTON ON SINGLE-GANG BRUSHED STAINLESS STEEL FACEPLATE (WITH SILKSCREENED SIGNAGE ON CERTAIN MODELS), WITH GREEN LED ILLUMINATED BUTTON

BUTTON ASSEMBLY CARRIES THE FOLLOWING RATINGS:

WATERTIGHT TO IP68 (IMMERSION PROOF BEYOND 1 METER.)

MOISTURE-PROOF TO IP64 (WATER SPLASHING FROM ANY DIRECTION SHALL HAVE NO HARMFUL EFFECT.)



DUST-TIGHT TO IP64 (NO INGRESS OF DUST; COMPLETE PROTECTION AGAINST CONTACT.)

MOMENTARY SPDT-DB (FORM Z) CONTACTS, RATED 3 AMPS @ 115VAC.

7" COLOR-CODED #18AWG WIRE LEAD TERMINATIONS.

TEMPERATURE RANGE: -67° F TO +185° F

WIRING INFORMATION

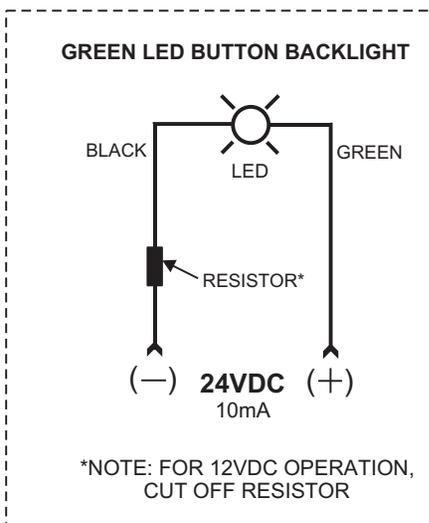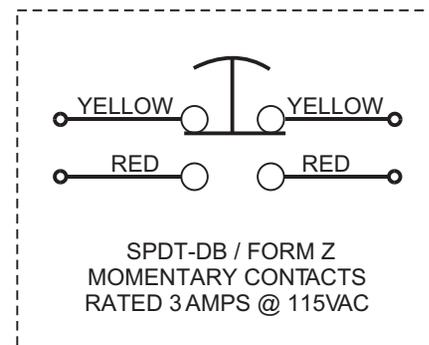

DynaLock Corporation
705 Emmett Street • Bristol, CT 06010
Tel: (860) 582-4761 • Fax: (860) 585-0338

Installation Instructions

DRWN: MJL Date: 6/25/08

CHK'D: Date:

CHK'D: JAS Date: 6/30/08

APPV'D: JAS Date: 6/30/08

Title: **6170 SERIES WEATHERPROOF PUSHBUTTON**

Page 1 of 1

Scale: —

Size: A

Drawing #: 600370

REV: —