

# 690 Series Heavy Duty Overhead Concealed Mount

## Holders & Stops

**SARGENT®**

**ASSA ABLOY**

### Interior or Exterior – High Traffic Doors

#### 690 Series

- Concealed application for exterior and interior single or double acting doors
- Two types to choose from:
  - “H” Holder; Stops and Holds doors open
  - “S” Stop; Stops door only
- Both series can be mounted to stop the door at any angle from 85° to 110°
- Non-handed (Reversible)

#### ANSI A156.8 Grade 1

690H Series BHMA Certified to CO1511  
690S Series BHMA Certified to CO1541

#### UL Classified

- SARGENT 690 Series stops are UL10B & 10C classified by Underwriter Laboratories as Miscellaneous Fire Door Accessories


#### Hold-Open Feature

- Convenient knob provides simple “on-off” control of hold-open feature
- Adjustable release tension

#### Accessories

- Standard screw packs
 


690H Series	21-2263 x finish
690S Series	21-2267 x finish

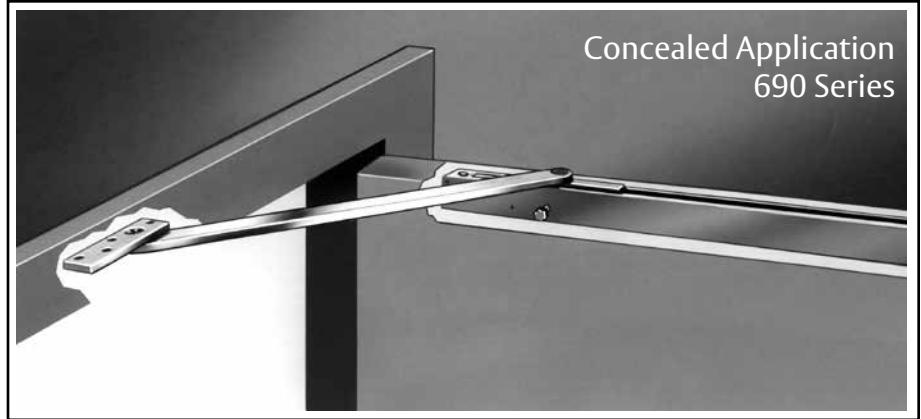

697H shown

#### Specifications

<b>For Doors</b>	Exterior and interior doors from 24" to 60" wide*. For doors 1-3/8" to 1-3/4" thick standard, Available for doors up to 3-1/4" thick, use 31- option and specify thickness
<b>Finishes</b>	03, 04, 9, 10, 10B, 10BL, 15, 20D, 26, 26D, and EN, EB, ED, EP, EAB powder coat
<b>Fasteners</b>	Wood screws and machine screws provided and specify thickness
<b>Options</b>	31- Doors 2" to 3-1/4" thick, specify door thickness 36- Torx Security machine screws. 8 required CPC- Clear Powder Coat SG- MicroShield® - antimicrobial silver-based finish

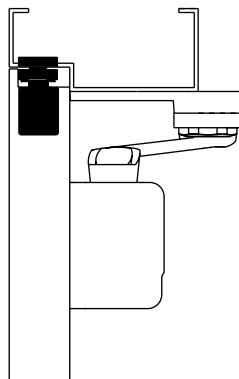

351-P10 shown with 697S on a single acting door

#### How to Order

Specify options, number, letter designation, finish and door thickness as required

**Example:** 31-CPC-697H x 03 x 2" door

Actual Width of Door	Sizing Chart	
	Stop with Hold-open	Stop Only
24" – 32-1/2"	697H	697S
32-5/8" – 39-1/8"	698H	698S
39-1/4" and over	699H	699S

\* When using vertical rod exit devices and/or surface/flush bolts, use caution in choosing the proper size to ensure compatibility