



INSTALLATION INSTRUCTIONS for L980 Mullion

SARGENT®**ASSA ABLOY**




FOR ASSISTANCE CONTACT SARGENT AT 800-727-5477 or www.sargentlock.com

- 1** Secure bottom retainer to surface of finished floor with (3) three round head screws and anchors.

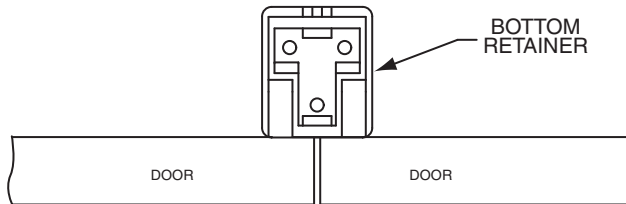

- 2** Secure top retainer to surface of top stop with (4) no. 14 x 1" flat head wood screws or with (4) 1/4"-20 x 5/8" flat head machine screws

Determine the length of the mullion by cutting off at the bottom end 1-7/8" less than dim "x". This will give 1/8" clearance at top.

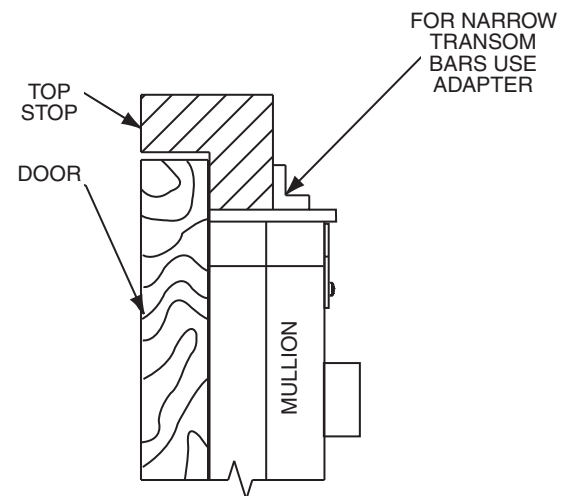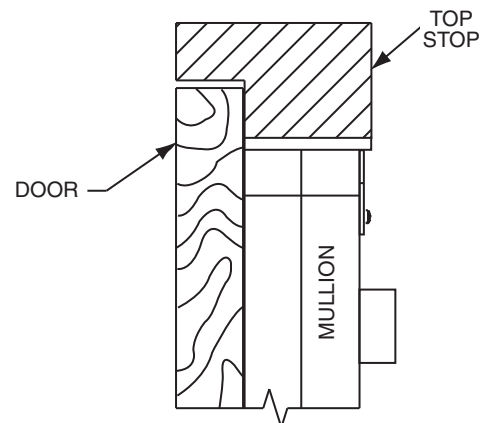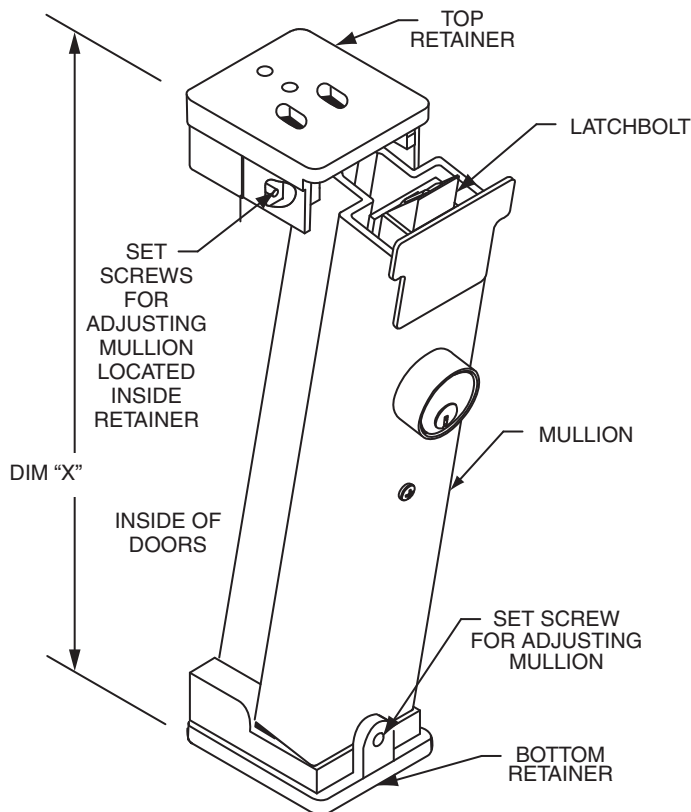

3 ADJUSTMENT OF MULLION

- A) IF THE LATCHBOLT DOES NOT SNAP IN THE TOP RETAINER, REMOVE MULLION AND TURN THE (2) SET SCREWS IN TOP RETAINER IN AND REINSTALL MULLION.
- B) IF TOP OF THE MULLION HAS EXCESSIVE AMOUNT OF PLAY, REMOVE THE MULLION AND BACK OUT THE (2) SET SCREWS IN TOP RETAINER AND REINSTALL THE MULLION.
- C) WHEN TOP OF MULLION IS SECURE, TIGHTEN BOTTOM SET SCREW ONLY ENOUGH TO REMOVE PLAY FROM THE MULLION.

Copyright © 2009, Sargent Manufacturing Company, an ASSA ABLOY Group company.
All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

ASSEMBLY INSTRUCTIONS for L980 Mullion

SARGENT

ASSA ABLOY


FOR ASSISTANCE CONTACT SARGENT AT 800-727-5477 or www.sargentlock.com

4 TO CHANGE OR INSTALL CYLINDER:

Slide chassis assembly into mullion and start lower mounting screw first.

With lower screw in place, install the two remaining screws through the support plate and into mullion and tighten securely.

Tighten lower mounting screw securely.

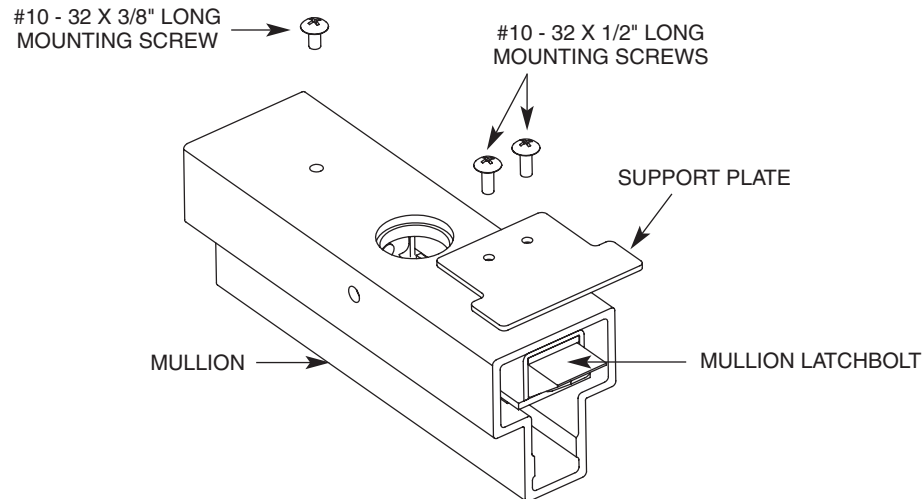

5 With chassis installed and secure, depress latchbolt.

Hold bolt depressed and screw cylinder in (making sure blocking ring is on) through mullion into chassis until it bottoms out.

Back off until keyway is at the bottom and name on the cylinder is straight.

Tighten locking screw so that end of locking arm mates with slot in the cylinder.
Tighten securely.

