



Overview

Schlage 650 Series keyswitches utilize an innovative magnetic spring design which allows installers to configure both clockwise and counterclockwise key turn direction as well as momentary or maintained action in seconds. Single gang and narrow stiles are available with numerous options which include heavy-duty plate, weather resistant cover (single gang size only), 2 LED lights – green/red, anti-tamper switch and Schlage Everest cylinder. in addition to the standard (630) satin stainless steel finish, there are five additional architectural finishes to choose from.



Features and benefits


- Easy to install and maintain
- Single gang and narrow stile offer ultimate flexibility
- Multiple options

Specifications

Standard keyswitch

- 5 amp@250 VAC
- Dual voltage
- SPDT contacts

ATS switch closes when cover is on 0.025A@28VDC LED indicator lights operate at 12/24 VDC 0.025A@28VDC

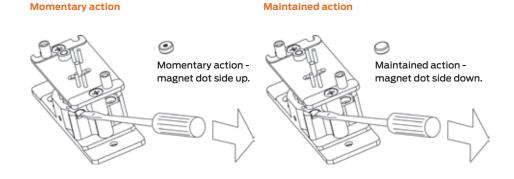

Ordering information

- 653-04 SPDT maintained single direction
- 653-05 SPDT momentary single direction
- 653-14 DPDT maintained single direction
- 653-15 DPDT momentary single direction
- 653-1414 (2) DPDT maintained bi-direction
- 653-1415 DPDT maintained x DPDT momentary
- 653-1515 (2) DPDT momentary bi-direction
- 653-041 SPDT maintained x key remove one position
- 653-0404 (2) SPDT maintained bi-direction
- 653-0405 SPDT maintained x SPDT momentary
- 653-141 DPDT maintained x key remove one position
- 653-0505 (2) SPDT momentary bi-direction

Options

- L2 Two LEDs (red/green), dual voltage
- NS Narrow stile stainless steel plate (1³/₄" x 4¹/₂")
- ATS Anti-tamper switch
- WP Weather-resistant cover fits 1 ¹/₆" cylinder only (not available with NS and L2 options)
- CYL 11/4" Schlage Everest® mortise cylinder and 1/8" spacer ring (keyed different)
- CYL-KA 11/4" Schlage Everest mortise cylinder and 1/8" spacer ring (keyed alike)

Finish - Heavy Duty Plate (HDP) included

- SF-630 Satin stainless steel (standard)
- SF-626 Satin chrome
- SF-605 Bright brass
- SF-612 Satin bronze
- SF-613 Oil satin bronze
- SF-625 Bright chrome

Note: 650 Series keyswitches operate with either a $1^{1/_8}$, $1^{1/_4}$, $1^{3/_8}$, or $1^{1/_2}$ cylinder having a straight type cam.

- 11/8" mortise cylinder fits direct in key switch no blocking ring required.
- 1¹/₄" cylinders require a ¹/₈" blocking/spacer ring, Schlage part number 36-079-012 or equivalent (included with the CYL and CYL-KA options).
- 1³/₈" mortise cylinder housing for SFIC cores requires ¹/₄" blocking ring Schlage part number 36-079-025 or equivalent.
- 1½" mortise cylinder housing for FSIC cores requires ³/₈" blocking ring Schlage part number 36-079-037 or equivalent.

All cylinders, except $1^{1/4}$ " as CYL or CYL-KA options, must be ordered separately.

Allegion, the Allegion logo, Schlage, and the Schlage logo are trademarks of Allegion plc, its subsidiaries and/or affiliates in the United States and other countries. All other trademarks are the property of their respective owners.

About Allegion

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA[®], Interflex[®], LCN[®], Schlage[®] and Von Duprin[®]. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries. For more, visit **www.allegion.com.**



© 2016 Allegion 003907 Rev. 08/16 www.allegion.com/us