

Stamped
cylinder rings

A cylinder ring is required if there is a gap between the cylinder head and the mounting surface when the cam is positioned for proper lock operation. Stamped cylinder rings may be stacked, if necessary, for some door applications.

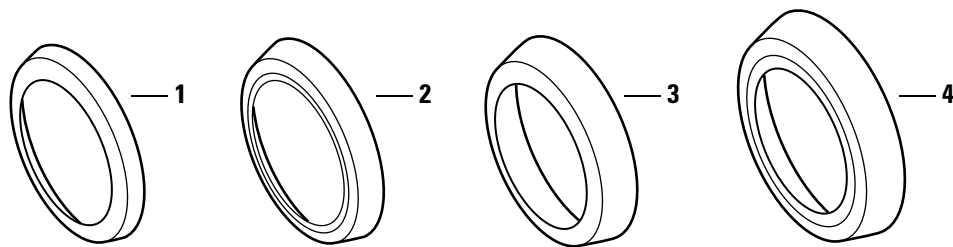


Figure 2.14 Standard cylinder rings

Stamped cylinder rings parts list

Item	Nomen- clature	Part no.	Length
1	1E-R2	A40102	1/8"
2	1E-R3	A40103	3/16"
3	1E-R4	A40104	1/4"
4	1E-R5	A40105	3/8"

Stamped cylinder
ring packages

Nomen- clature	Rings included
RP [†]	1E-R3—3/16" 1E-R5—3/8"
RP1	1E-R2—1/8" 1E-R3—3/16"
RP2	1E-R2—1/8" 1E-R4—1/4"
RP3 [‡]	1E-R2—1/8" 1E-R4—1/4" 1E-R5—3/8"

† Supplied standard with
7-pin rim cylinders.

‡ Supplied standard with
7-pin mortise cylinders.