


# Rabbeted thresholds


## 564

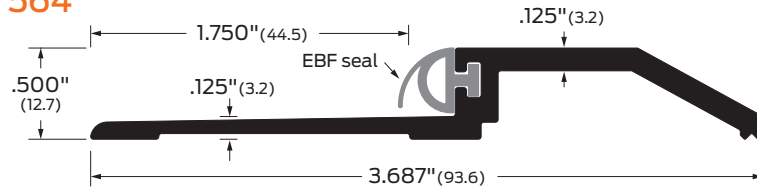

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b> <small>CERTIFIED</small>	<b>ANSI/BHMA:</b>	
A, BK, D, G	E, EL, V3,		564A, 564D, 564G, 564BK	J36300
B, B-ORB	EV3, ELV3		564A-E, 564D-E, 564G-E, 564BK-E	J36400
	(not available for B-ORB finish)		564B	J16300
			564B-E	J16400

Suitable for sound control applications and OEM use.  
Neoprene extruded bulb/finger for double-sealing protection.


## 566

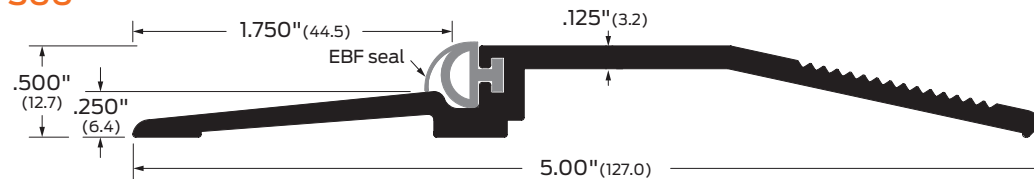

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b> <small>CERTIFIED</small>	<b>ANSI/BHMA:</b>	
A, BK, D, G	E, EL, V3,		566A, 566D, 566G	J36100, J36130
	EV3, ELV3		566A-E, 566D-E, 566G-E, 566BK-E	J36200, J36230

Neoprene extruded bulb/finger for double-sealing protection.


## 567

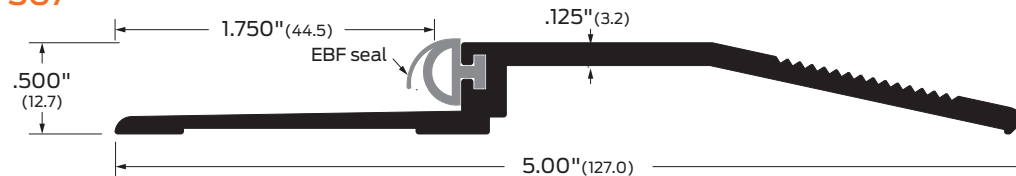

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b> <small>CERTIFIED</small>	<b>ANSI/BHMA:</b>	
B, B-ORB	E, EL, V3,		567B	J16100
	EV3, ELV3		567B-E	J16200
	(not available for B-ORB finish)			

Extruded bulb/finger for double-sealing protection.

## 568

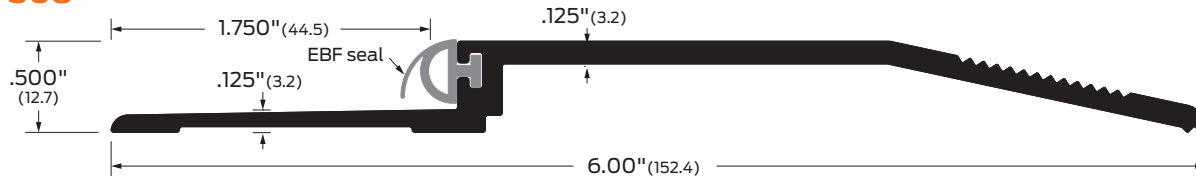

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b> <small>CERTIFIED</small>	<b>ANSI/BHMA:</b>	
A, BK, D, G	E, EL, V3,		568A, 568D, 568G, 568BK	J36100
	EV3, ELV3		568A-E, 568D-E, 568G-E, 568BK-E	J36200

Neoprene extruded bulb/finger for double-sealing protection.

See Thresholds Accessories & options page for details.

### Finishes:

<b>A</b>	Aluminum mill finish
<b>BK</b>	Aluminum black anodized
<b>D</b>	Aluminum dark bronze anodized
<b>G</b>	Aluminum gold anodized
<b>B</b>	Bronze, architectural mill finish
<b>B-ORB</b>	Oil-rubbed bronze

### Options:

<b>E</b>	Epoxy abrasive tread
<b>EL</b>	Photoluminescent and abrasive epoxy tread
<b>V3</b>	Full body strength fill
<b>EV3</b>	Epoxy and full body strength fill
<b>ELV3</b>	Photoluminescent and abrasive epoxy tread, full body strength fill

### Note:


Special anchors available for mounting most thresholds on concrete surfaces.

## Thresholds

## Rabbeted thresholds—standard



267

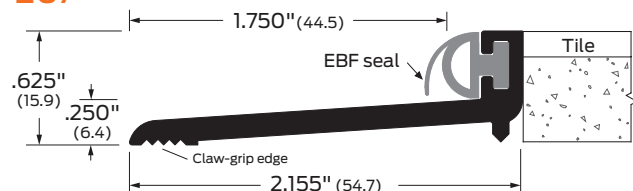

Finishes: A, BK, D, G  
Options: E, EL




ANSI/BHMA: 267A, 264D, 267G, 267BK  
267A-E, 267D-E, 267G-E, 267BK-E

J36300  
J36400

Suitable for uneven floors.  
Neoprene extruded bulb/finger for double-sealing protection.

663

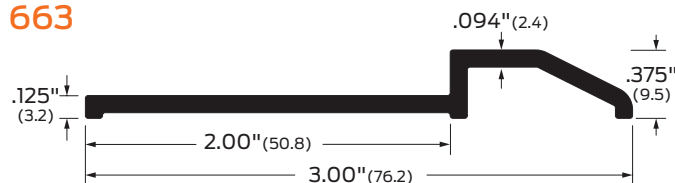


Finishes: A, BK, D, G  
Options: E, EL, V3, EV3, ELV3



ANSI/BHMA: 663A, 663D, 663G, 663BK  
J37300, J35300

Rabbeted, butt and transition.  
Supplied without mounting holes.

265

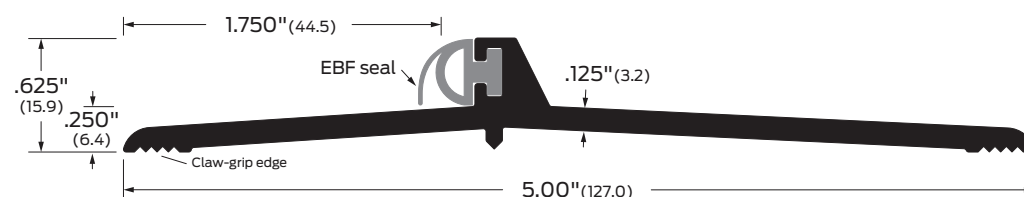

Finishes: A, BK, D, G  
Options: E, EL, V3, EV3, ELV3




ANSI/BHMA: 265A, 265D, 265G, 265BK  
265A-E, 265D-E, 265G-E, 265BK-E

J36300  
J36400

For latch track hardware.  
Neoprene extruded bulb/finger for double-sealing protection.

65

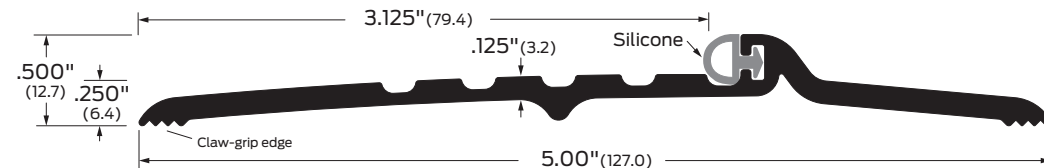

Finishes: A, BK, D, G, B, B-ORB  
Options: E, EL, V3, EV3, ELV3 (not available for ORB finish)




ANSI/BHMA: 65A, 65D, 65G, 65BK  
65A-E, 65D-E, 65G-E, 65BK-E  
65B  
65B-E

J36100, J36130  
J36200, J36230  
J16100, J16130  
J16200, J16230

For latch track hardware.

560

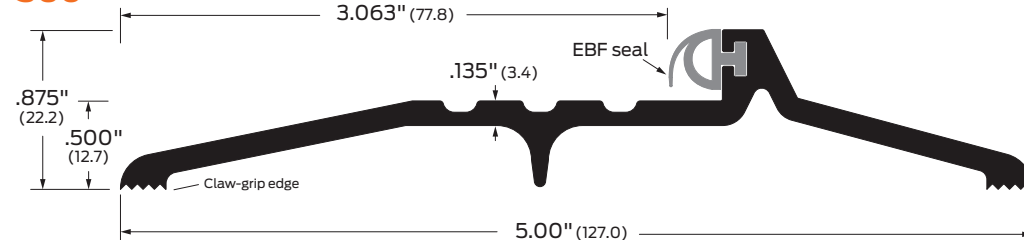


Finishes: A, BK, D, G  
Options: E, EL, V3, EV3, ELV3



ANSI/BHMA: 560A, 560D, 560G, 560BK  
560A-E, 560D-E, 560G-E, 560BK-E

J36100  
J36200

For latch track hardware.  
Neoprene extruded bulb/finger for double-sealing protection.



Specialty designed for bottom-latching exits and locks.

See Thresholds Accessories & options page for details.

## Finishes:

**A** Aluminum mill finish  
**BK** Aluminum black anodized  
**D** Aluminum dark bronze anodized  
**G** Aluminum gold anodized  
**B** Bronze, architectural mill finish  
**B-ORB** Oil-rubbed bronze

## Options:


**E** Epoxy abrasive tread  
**EL** Photoluminescent and abrasive epoxy tread  
**V3** Full body strength fill  
**EV3** Epoxy and full body strength fill  
**ELV3** Photoluminescent and abrasive epoxy tread, full body strength fill

## Note:

Special anchors available for mounting most thresholds on concrete surfaces.

# Rabbeted thresholds


## 561

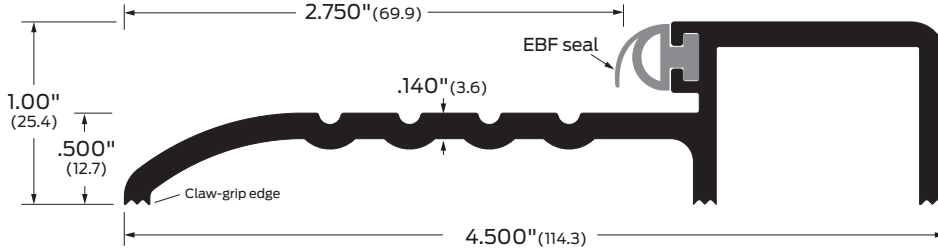

**Finishes:** A, BK, D, G **Options:** E, EL, V3, EV3, ELV3 **BHMA CERTIFICATION** **ANSI/BHMA:** 561A, 561D, 561G, 561BK 561A-E, 561D-E, 561G-E, 561BK-E J36100 J36200

Neoprene extruded bulb/finger for double-sealing protection.


## 563

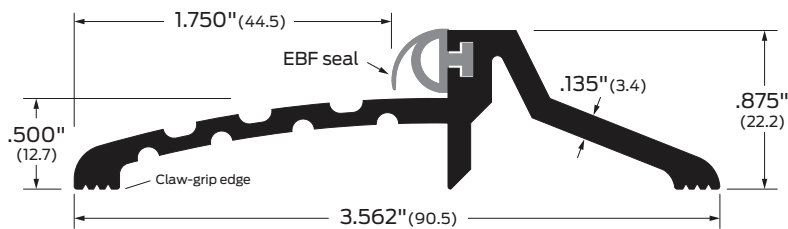

**Finishes:** A, BK, D, G **Options:** E, EL, V3, EV3, ELV3 **BHMA CERTIFICATION** **ANSI/BHMA:** 563A, 563D, 563G, 563BK 563A-E, 563D-E, 563G-E, 563BK-E J36100 J36200

Neoprene extruded bulb/finger for double-sealing protection.

## 565

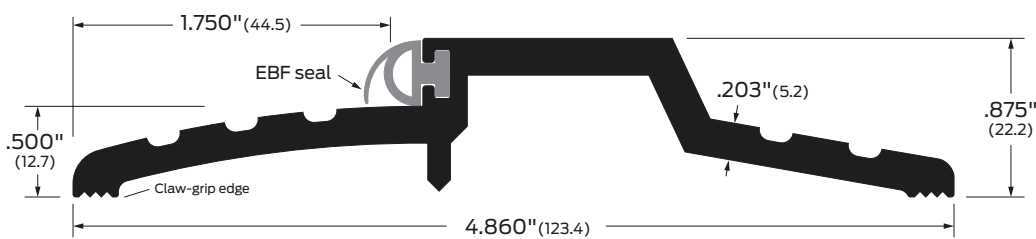

**Finishes:** A, BK, D, G, B, B-ORB **Options:** E, EL, V3, EV3, ELV3 (not available for B-ORB finish) **BHMA CERTIFICATION** **ANSI/BHMA:** 565A, 565D, 565G, 565BK 565A-E, 565D-E, 565G-E, 565BK-E 565B 565B-E J36100 J36200 J16100 J16200

Neoprene extruded bulb/finger for double-sealing protection.

See Thresholds Accessories & options page for details.

### Finishes:

**A** Aluminum mill finish  
**BK** Aluminum black anodized  
**D** Aluminum dark bronze anodized  
**G** Aluminum gold anodized  
**B** Bronze, architectural mill finish  
**B-ORB** Oil-rubbed bronze

### Options:

**E** Epoxy abrasive tread  
**EL** Photoluminescent and abrasive epoxy tread  
**V3** Full body strength fill  
**EV3** Epoxy and full body strength fill  
**ELV3** Photoluminescent and abrasive epoxy tread, full body strength fill

### Note:

Special anchors available for mounting most thresholds on concrete surfaces.