



### PRODUCT FEATURES

- Redundant switches
- Release triggered by either 1/8" mechanical movement or reliable touch sense technology
- Resistant to interference from radio frequency or electromagnetic frequency and external impact/bounce attempts
- All metal construction
- Can be field cut to fit non-standard door widths
- 16 ft. [4.8m] 22AWG 6 conductor cable and armored door cord included
- Automatic dual-voltage 12 VDC or 24 VDC
- Resists electrostatic discharge up to 27,000 volts
- MagnaCare® lifetime replacement, no fault warranty

### PRODUCT OPTIONS

- 36" (914mm) Length
- 42" (1,067mm) Length
- 48" (1,219mm) Length
- (EL) ElectroLynx® ready
- (I) Illuminated via fiber optics
- Through-bolt kit for doors 1-3/4" to 2-1/4" thick

### SPECIFICATIONS

- CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- NFPA 101
- Patent pending

#### Electrical:

Dual Sense Bar Only -  
24 mA at 12 VDC or 24 VDC

Dual Sense Bar with Illumination -  
44 mA at 12 VDC or 24 VDC

#### Operating Temperature:

+32 to +120F [0 to +49C]  
Indoor use only

#### Shipping Weight:

6 lbs [2.72kg] to 8 lbs [3.63kg]  
depending on length

#### Finishes:

BK - Black anodized  
CL - Clear anodized

# DSB

## Dual Sense® Bar


### Dependable Touch and Mechanical Release for Superior Safety and Redundancy

The dependable DSB Dual Sense Bar is the most reliable exit device available for magnetically locked, non-fire-rated doors. Its unique design delivers superior fault tolerance with two independent, redundant switch circuits for releasing the lock. The DSB can be installed on all types of interior metal, aluminum or wood doors. Meets "no special tools or knowledge" criteria required by code.

### » MODELS

PART # | Description

<b>DSB-BK</b>	DSB - 36", Black Anodized
<b>DSB-BK42</b>	DSB - 42", Black Anodized
<b>DSB-BK48</b>	DSB - 48", Black Anodized
<b>DSB-BKI</b>	DSB - 36", Illuminated, Black Anodized
<b>DSB-BKI42</b>	DSB - 42", Illuminated, Black Anodized
<b>DSB-BKI48</b>	DSB - 48", Illuminated, Black Anodized
<b>DSB-CL</b>	DSB - 36", Clear Anodized
<b>DSB-CL42</b>	DSB - 42", Clear Anodized
<b>DSB-CL48</b>	DSB - 48", Clear Anodized
<b>DSB-CLI</b>	DSB - 36", Illuminated, Clear Anodized
<b>DSB-CLI42</b>	DSB - 42", Illuminated, Clear Anodized
<b>DSB-CLI48</b>	DSB - 48", Illuminated, Clear Anodized
<b>DSB-TDM</b>	Through Door Mounting Kit for DSB
<b>EL-DSB-CL</b>	Dual Sense Bar - 36", Clear Anodized, ElectroLynx®
<b>TCP-BK</b>	Touch Bar Cover Plates - Set of 2, Black Anodized
<b>TCP-CL</b>	Touch Bar Cover Plates - Set of 2, Clear Anodized

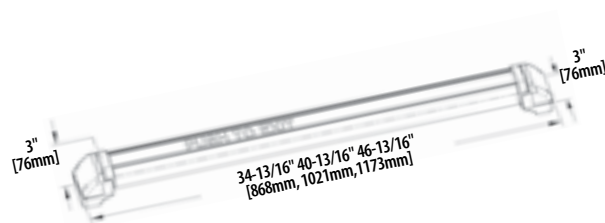

DUAL VOLTAGE



**SECURITRON**  
ASSA ABLOY